





Model	G200F(D)
Engine type	Single cylinder, Air cooled, 4-stroke, OHV
Displacement	196cc
Net power	4.1kW/3600r/min
Bore x Stroke	68mm×54mm
Net torque	12.4/2500Nm / r / min
Starting system	Recoil/Electric
Lubrication system	Splash
Air filter	Foam+paper, oil bath, cyclone-type filter element
Engine oil capacity	0.6L
Fuel tank capacity	3.6L
Net weight	16/19kg
Dimension	312mm×376mm×335mm

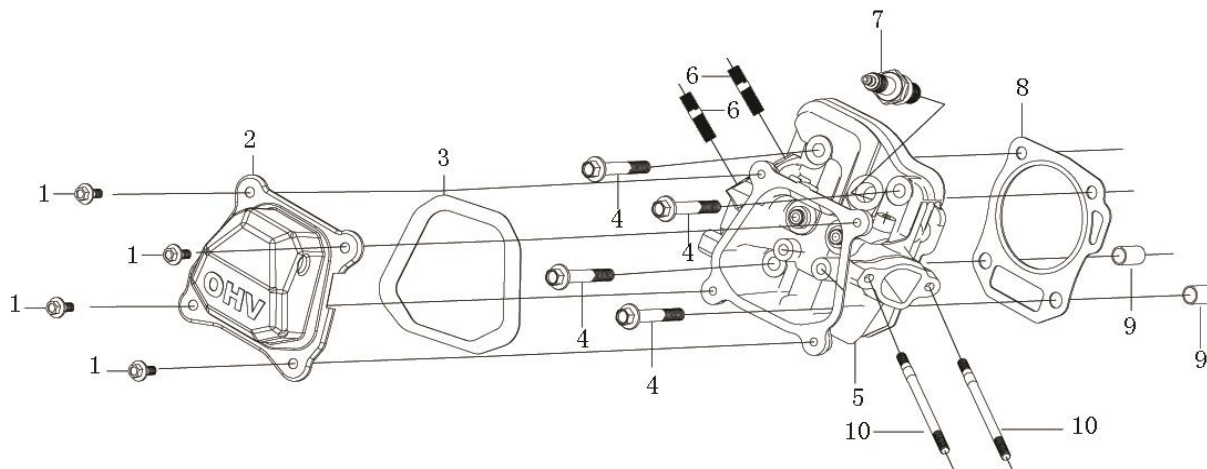

气缸头 (CYLINDER HEAD)

序号	零部件件号	零部件名称	Description	规格状态	数量	易损属性
No.	Part No.				Reqd. QTY	CONSUMABLE GRAI
1			Hexagon bolt with flange	GB/T 16674.1_M6_L=14;镀蓝白锌Q16	4	C
2			Cylinder head cover	T040_横式;OHV凸字_镀蓝白锌Q16	1	C
3	120250013-0001	气缸头盖密封垫	Gasket for cylinder head cover	T040_软木橡胶板;	1	A
4			Hexagon bolt with flange	T040_M8_L=60;镀蓝白锌Q16	4	C
5			Cylinder head	T050;	1	B
6			Stud	T040_M8_L=34;镀蓝白锌Q16	2	C
7	270960014-0001	火花塞	Spark plug	F7RTC_无干扰;	1	A
8	120150144-0001	气缸头密封垫	Gasket for cylinder head	T040_石墨_厚1.2;含Hg/Cr6/P6/PBB/PBDE≤1000ppm,Cd≤100ppm	1	A
9			Location pin	T040_d=10_L=14;	2	C
10			Stud	T040_M6_L=113;镀蓝白锌Q16	2	C

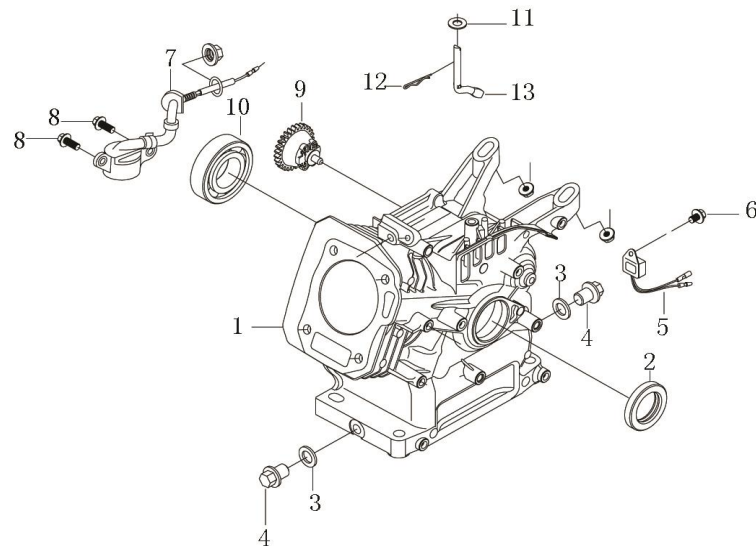


曲轴箱体 (CRANK CASE)

序号	零部件件号	零部件名称	Description	规格状态	数量	易损属性
No.	Part No.				Reqd. QTY	CONSUMABLE GRADE
1			Crankcase body	T050 有孔;	1	B
2			Oil seal	T320_d=25_D=41.25_b=6_内烯酸脂C11;含Hg/Cr6 /Pb/PPB/PRDE≤1000ppm_Cd≤100ppm	1	A
3			Flat washer	T040_T21_内径10_外径16_厚度1.5_铝及铝合金;	2	C
4			Sealing plug screw	T040_M10×1.25×15;镀蓝白锌Q16	2	C
5	281890001-0001	机油保护器	ALART UNIT ,OIL	T040;	1	A
6			BOLT , FLANGE	GB/T 16674.1_M6_L=10;镀蓝白锌Q16	1	C
7	281850150-0001	油位传感器	OIL LEVEL SWITCH	T040_电感式;	1	A
8			BOLT , FLANGE	GB/T 16674.1_M6_L=14;镀蓝白锌Q16	2	C
9			Components of governor gear	T040_飞块重3.7g;	1	B
10			Bearing	GB/T 276_6205;	1	B
11			Flat washer	T040_T21_内径6_外径13_厚度1;镀蓝白锌Q16	1	C
12			Pin clip	T040_调速臂用;	1	B
13			Speed regulating arm	T040;	1	B


[illegible]


[illegible]

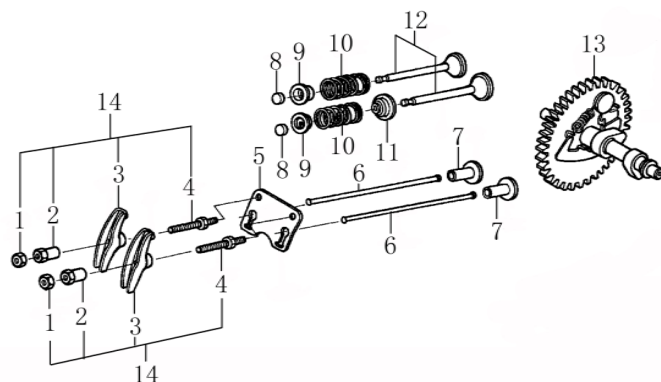

配气系统(GAS DISTRIBUTION ADJUSTMENT)


序号	零部件件号	零部件名称	Description	规格状态	数量	易损属性
No.	Part No.				Reqd. QTY	CONSUMABLE GRADE
1			Valve lock nut	T040;	2	B
2			Adjustable nut of valve	T040;	2	B
3			Valve rocker	T040;	2	B
4			Adjustable bolt of valve	T040;	2	B
5			Plate, push rod guide	T040; 镀蓝白锌Q16	1	B
6			Push rod	T040; 含Hg/Cr6/Pb/PBB/PBDE ≤1000ppm, Cd≤100ppm	2	B
7			Lifter, Valve	T050; 含Hg/Cr6/Pb/PBB/PBDE ≤1000ppm, Cd≤100ppm	2	B
8			Valve adjustment cap	T040; 含Hg/Cr6/Pb/PBB/PBDE ≤1000ppm, Cd≤100ppm	2	B
9			Retainer, valve spring	T040_排气门用, 改进型; 含Hg/ Cr6/Pb/PBB/PBDE≤1000ppm, C	2	B
10			Inner spring of valve	T040; 含Hg/Cr6/Pb/PBB/PBDE ≤1000ppm, Cd≤100ppm	2	B
11			Valve oil seal	T040; 含Hg/Cr6/Pb/PBB/PBDE ≤1000ppm, Cd≤100ppm	1	A
12			Valve Kit	T040_进排气门材质4CF10Si2M n 无氮化处理; 含Hg/Cr6/Pb/P	1	B
13			Camshaft assy	T050_增压, 全金属; 减压阀为 用也离心; 含Hg/Cr6/Pb/PBB/P	1	B
14			Valve rocker combination	T040; 含Hg/Cr6/Pb/PBB/PBDE ≤1000ppm, Cd≤100ppm	2	B

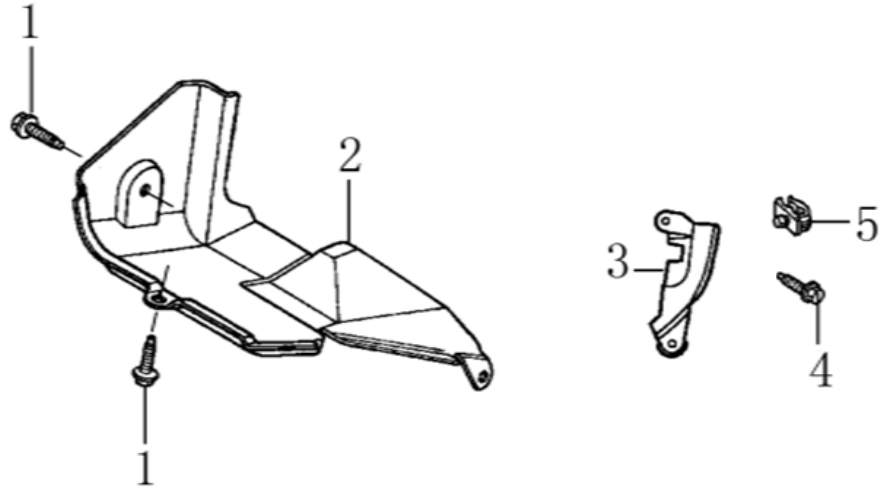[illegible]

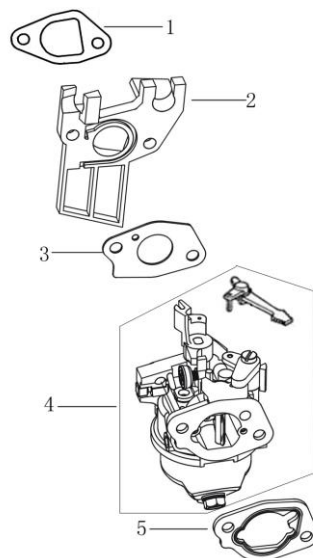


化油器 (CARBURETOR)

[illegible]

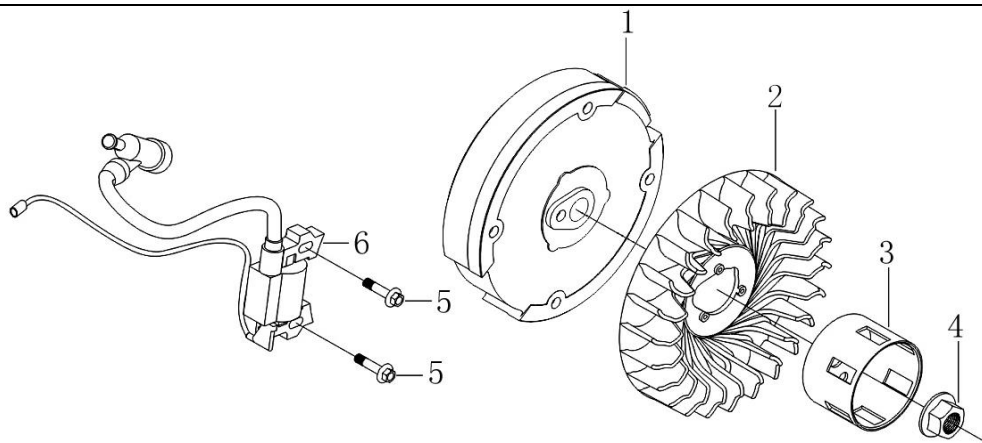


转子部件 (飞轮) / 点火线圈 (FLYWHEEL/COIL ASSY.)

[illegible]

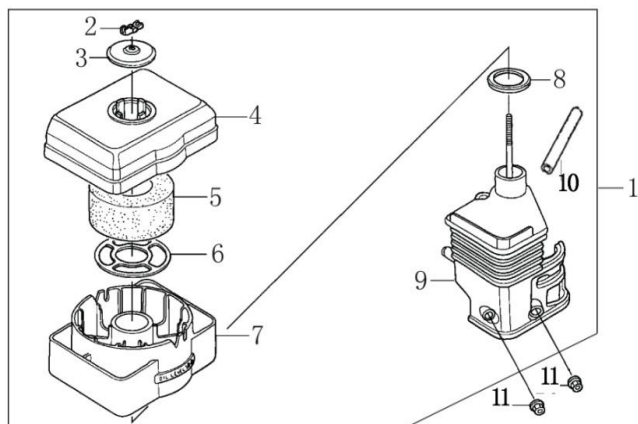

空滤器 (AIR CLEANER)

序号	零部件件号	零部件名称	Description	规格状态	数量	易损属性
No.	Part No.				Reqd. QTY	CONSUMABLE GRADE
1	180020320-0002	空滤器	Air filter	T040_油滤式;满足REACH要求	1	B
2		蝶形螺母	Butterfly nut	GB/T 62.1_M6;镀蓝白锌Q16	1	C
3		空滤器压板	Air filter pressing plate	T040_油滤式;镀蓝白锌Q16	1	B
4		空滤器壳体盖	Air filter casing cover	T040_油滤式;	1	C
5		空滤器滤芯组合	Air filter element combination	T040_油浴式;	1	A
6		空滤器滤芯支撑板	Air filter element Support plate	T040_油滤式;镀蓝白锌Q16	1	B
7		滤芯支撑板体	Support plate body of filter element	T040_油滤式;	1	B
8		密封圈	Seal ring	T040_空滤器座体_D=33_外径47_厚度3;	1	A
9		空滤器座	Air filter seat	T040_油滤式;	1	B
10		通气管	Breather tube	T040_丁腈橡胶_废气管;	1	A
11		六角法兰面螺母	Hexagon nut with flange	GB/T 6177.1_M6;镀蓝白锌Q16	2	C

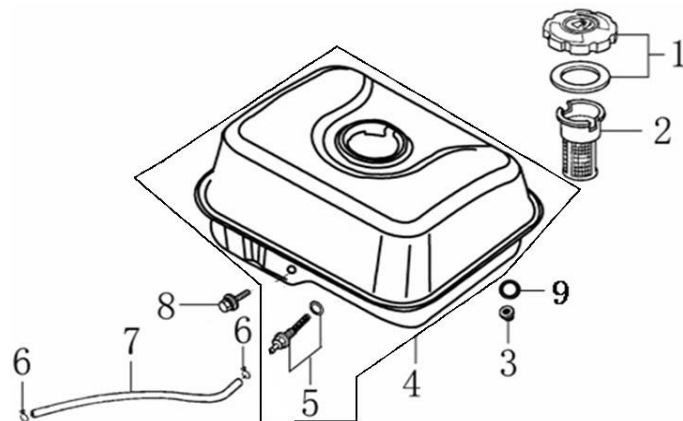

燃油箱 (FUEL TANK)

序号	零部件件号	零部件名称	Description	规格状态	数量	易损属性
No.	Part No.				Reqd. QTY	CONSUMABLE GRADE
1	170870039-0001	油箱盖	Tank cover	T040_A款_塑料;油壶标识_亚光黑(塑料)	1	B
2			Pouring orifice filter screen combination	T040;满足REACH要求	1	A
3			Hexagon nut with flange	GB/T 6177.1_M6;镀蓝白锌Q16	2	C
4	170500522-0052	油箱	Tank	T040_金属_C款_加厚;纯黑H01_带出油嘴	1	B
5	170660077-0001	油箱出油嘴	Tank oilout	T040;	1	A
6			Pipe clip	T040_油管卡圈;	2	B
7			Oil tube	T040_内径4_外径8_长155;满足ROHS要求	1	A
8			Hexagon bolt with flange	GB/T 16674.1_M6_L=25;镀蓝白锌Q16	1	C
9			rubber flat gasket	T040_内径8.5_外径17_厚度2.5_出油嘴 胶圈.	2	A