


# A28150


## LED WORK LIGHT

**2  
LIGHT  
IN ONE!**



**Amber flashing ECE R65**


### Dimensions

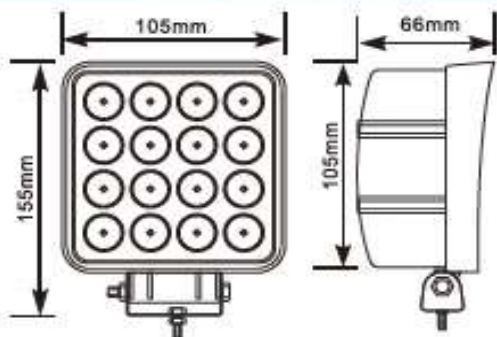


### Specification

|                        |                           |
|------------------------|---------------------------|
| <b>Voltage</b>         | <b>12-30V</b>             |
| <b>Power</b>           | <b>35W</b>                |
| <b>Light Source</b>    | <b>16*1W / 16*3W</b>      |
| <b>Effective Lumen</b> | <b>3000LM</b>             |
| <b>Current</b>         | <b>12V@2.9A, 24V@1.5A</b> |
| <b>Temperature</b>     | <b>-30°C ~ +70°C</b>      |
| <b>Lens Material</b>   | <b>PC</b>                 |

### Installation

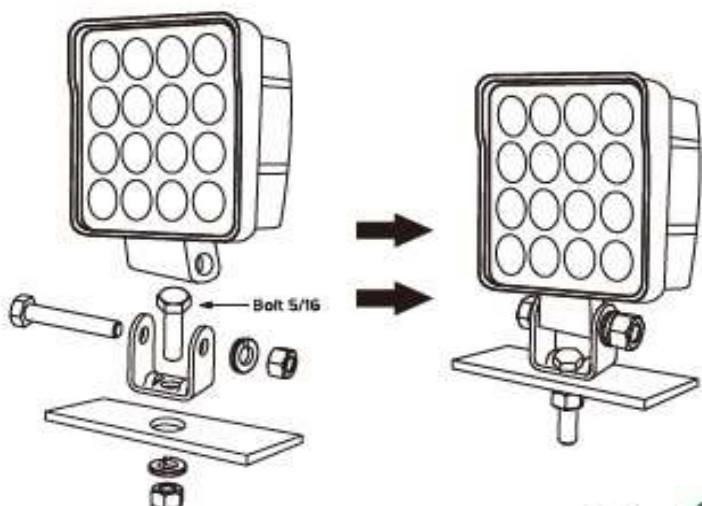

### Wiring for work lights

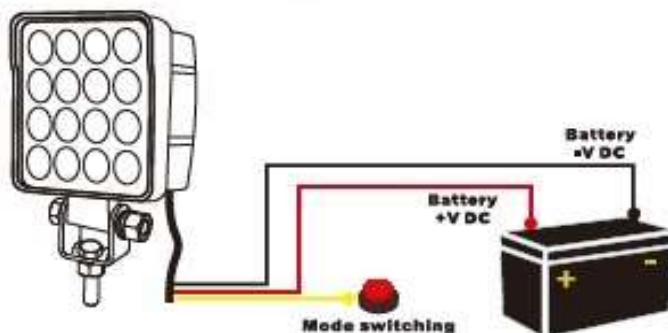

### WARNING

Do not look directly into LEDs while in operation; may cause momentary blindness and/or eye damage.  
Do not touch lights until they cool down after working.

CE  RoHS EMC R10